

09-07-00

A

UTILITY PATENT APPLICATION TRANSMITTAL

Assistant Commissioner for Patents
Washington, D.C. 20231
BOX PATENT APPLICATION

Attorney Docket No.: PA000442

Date: 9/6/00

Express Mail Label No.: EF089287347US

PTO
09/06/00
09/655609
U.S. PATENT

Dear Sir:

Transmitted herewith for filing is the patent application of:

Inventor(s): DAISUKE TERASAWA ET AL

For: METHOD AND APPARATUS FOR PROCESSING A PHYSICAL CHANNEL WITH PARTIAL
TRANSPORT FORMAT INFORMATION

Enclosed are:

1. ☒ Patent application (29) total pages.
2. ☒ Drawings: ☒ Formal (10) sheet(s) or ☐ Informal () sheet(s).
3. ☒ Declaration/Power of Attorney: ☐ Signed ☒ Unsigned
4. ☐ An Assignment () pages and Recordation Form Cover Sheet.
5. ☐ A Preliminary Amendment () pages.
6. ☐ Information Disclosure Statement (IDS):
 - a. ☐ PTO-1449
 - b. ☐ Copies of IDS Citations (number of citations:)
7. ☒ Other: Cert of Express Mail

CLAIMS:	(a) Filed	(b) Extra Claims	Large Entity Fee	Fee Paid
Total*	24 - 20	4	x \$18 =	\$72
Independent**	4 - 3	1	x \$78 =	\$78
Multiple Dependent Claim(s): <input checked="" type="checkbox"/> No <input type="checkbox"/> Yes			\$260	\$0
APPLICATION FILING FEE			\$690	\$690
			TOTAL FEE	\$840


*If the number in column a is less than 20, enter 0 in column b.

**If the number in column b is less than 3, enter 0 in column b.

8. ☒ Please charge Deposit Account No. 17-0026 of QUALCOMM Incorporated the amount of \$840.00. The Commissioner is hereby authorized to charge payment of any additional fees which may be required, or credit any overpayment, to said Deposit Account No. 17-0026. A duplicate of this sheet is enclosed for fee processing.
9. ☒ The Commissioner is further hereby authorized to charge to said Deposit Account No. 17-0026, pursuant to 37 CFR 1.25(b), any fee whatsoever which may become properly due or payable, as set forth in 37 CFR 1.16 to 37 CFR 1.18 inclusive, for the entire pendency of this application without specific additional authorization.

Date: 9/6/00

Signature:


 Byron Yafuso, Reg. No. 45,244

 QUALCOMM Incorporated
 5775 Morehouse Drive
 San Diego, California 92121-1714
 Telephone: (858) 651-6732
 Facsimile: (858) 658-2502

PATENT

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In Re Application of)
DAISUKE TERASAWA ET AL.) For: METHOD AND APPARATUS FOR
) PROCESSING A PHYSICAL
) CHANNEL WITH PARTIAL
Serial No. UNKNOWN) TRANSPORT FORMAT
) INFORMATION
)
Filed: HEREWITH) Group Art Unit: UNKNOWN

CERTIFICATE OF MAILING UNDER 37 CFR § 1.10

Assistant Commissioner of Patents
BOX PATENT APPLICATIONS
Washington, D.C. 20231

Dear Sir:

"Express Mail" mailing label No. EF089287371US
Date of Deposit September 6, 2000

I hereby certify that this paper or fee is being deposited with the United States Postal Service "Express Mail Post Office to Addressee" service under 37 CFR § 1.10 on the date indicated above and is addressed to the Assistant Commissioner of Patents, BOX PATENT APPLICATIONS, Washington, D.C. 20231.

Stephanie Young

(Name)

Stephanie Young
(Signature)

QUALCOMM Incorporated
5775 Morehouse Drive
San Diego, California 92121-1714
Telephone: (858) 658-4851
Facsimile: (858) 658-2502

METHOD AND APPARATUS FOR PROCESSING A PHYSICAL CHANNEL WITH PARTIAL TRANSPORT FORMAT INFORMATION

5 BACKGROUND OF THE INVENTION

I. Field of the Invention

The present invention relates to data communication. More particularly,
10 the present invention relates to a novel and improved method and apparatus
for processing a physical channel with partial transport format information.

II. Description of the Related Art

15 A modern day communications system is required to support a variety
of applications. One such communications system is a code division multiple
access (CDMA) system that supports voice and data communication between
users over a terrestrial link. The use of CDMA techniques in a multiple access
communication system is disclosed in U.S. Patent No. 4,901,307, entitled
20 "SPREAD SPECTRUM MULTIPLE ACCESS COMMUNICATION SYSTEM
USING SATELLITE OR TERRESTRIAL REPEATERS," and U.S. Patent No.
5,103,459, entitled "SYSTEM AND METHOD FOR GENERATING
WAVEFORMS IN A CDMA CELLULAR TELEPHONE SYSTEM," both
assigned to the assignee of the present invention and incorporated herein by
25 reference.

A CDMA system is typically designed to conform to one or more
standards. One such first generation standard is the "TIA/EIA/IS-95 Remote
Station-Base Station Compatibility Standard for Dual-Mode Wideband Spread
Spectrum Cellular System," hereinafter referred to as the IS-95 standard and
30 incorporated herein by reference. IS-95 compliant CDMA systems are able to
transmit voice data and packet data. A newer generation standard is offered by
a consortium named "3rd Generation Partnership Project" (3GPP) and embodied
in a set of documents including Document Nos. 3G TS 25.211, 3G TS 25.212, 3G
TS 25.213, and 3G TS 25.214, which are readily available to the public. The
35 3GPP standard is hereinafter referred to as the W-CDMA standard and
incorporated herein by reference.

The W-CDMA standard defines a channel structure capable of
supporting a number of users and designed for efficient transmission of packet
data. In accordance with the W-CDMA standard, a user is typically assigned a

"dedicated" channel on the downlink (i.e., from the base station to the user) and the uplink (i.e., from the user to the base station) for the duration of the call. The dedicated channel can be used for voice communication or transmission of small amounts of packet data, and thus has a (relatively) low bit rate. When the
5 base station has a large amount of data to transmit, a "shared" channel may be assigned and used for the data transmission. The shared channel is allocated and de-allocated to users as needed.

The shared channel has a structure that supports a variety of uses and a bit rate that can be varied between a range of values (e.g., from 15 kbps up to
10 1.92 Mbps). The shared channel bit rate can also be dynamically changed from radio frame to radio frame, with each radio frame being a unit of transmission covering 15 time slots and each time slot corresponding to 0.667 msec.

In accordance with the W-CDMA standard, certain information necessary to properly recover the data transmitted on the shared channel is
15 provided on the dedicated channel assigned to the user. For example, in certain instances, the bit rate of the radio frame and the channelization code (akin to the Walsh code in the IS-95 CDMA system) used to channelize the shared channel are provided on the dedicated channel at approximately the same time as the data transmission on the shared channel. Consequently, the
20 receiver unit is not able to process and recover the data on the shared channel in real-time.

Thus, techniques that can be used to efficiently process a physical channel, such as the shared channel in the W-CDMA system, when some characteristics of the physical channel are not known are highly desirable.

25

SUMMARY OF THE INVENTION

The present invention provides techniques to process a physical channel in which at least some of the information needed to fully process the physical
30 channel is not available at the time of processing. In accordance with the invention, for a parameter that is unknown (e.g., a channelization code), a determination is made as to the possible values for that parameter. A hypothesized parameter value is then selected and used to process the physical channel to provide intermediate results, which require less storage than the
35 unprocessed samples. The hypothesized parameter value is selected such that the intermediate results can further be processed, when the actual parameter value is known, to obtain the final results.

Certain aspects of the invention are especially suited for processing a received signal that has been processed and transmitted in accordance with a

space time block coding transmit antenna diversity (STTD) mode defined by the W-CDMA standard. For some data transmissions in the W-CDMA system, the actual channelization code may not be known at the time of the data recovery at the receiver unit. For these data transmissions, a hypothesized channelization code can be used to partially process the received samples, to reduce the amount of data to be stored before the actual channelization code can be determined. The hypothesized channelization code is a fraction of, and can be used to generate the actual channelization code.

An aspect of the invention provides a method for recovering data transmitted on a physical channel in which a channelization code used for the physical channel is not known at the time of the data recovery. In accordance with the method, a modulated signal is received and processed to provide samples. A hypothesized channelization code is then selected and used to process the samples to generate partially processed symbols. Intermediate results representative of the partially processed symbols are stored and, upon determination of an actual channelization code used for the physical channel, further processed in accordance with the actual and hypothesized channelization codes to provide the final results.

The hypothesized channelization code is a "base" code that can be used to generate all possible channelization codes that may have been used to process the physical channel. The hypothesized channelization code has a length that is shorter or equal to that of the actual channelization code. For a W-CDMA system, the hypothesized channelization code can be an orthogonal variable spreading factor (OVSF) code and can have a spreading factor of four or greater (e.g., four to 512). However, it is advantageous to use a hypothesized OVSF code having the largest possible spreading factor among the OVSF codes that can be used to generate all possible actual OVSF codes.

Various aspects, embodiments, and features of the invention are described in further detail below.

BRIEF DESCRIPTION OF THE DRAWINGS

The features, nature, and advantages of the present invention will become more apparent from the detailed description set forth below when taken in conjunction with the drawings in which like reference characters identify correspondingly throughout and wherein:

FIG. 1 is a diagram of a spread spectrum communications system that supports a number of users;

FIG. 2 is a simplified block diagram of an embodiment of the signal processing for a downlink physical channel;

FIG. 3A is a block diagram of a modulator, a transmitter, and antennas that support transmission of a physical channel over two antennas;

FIG. 3B is a block diagram of an embodiment of a portion of the transmitter;

FIGS. 4A and 4B are diagrams that illustrate the encoding performed by an STTD encoder using bit notation and complex notation, respectively;

FIG. 5 is a diagram that illustrates the generation of the OVSF codes;

FIG. 6 is a flow diagram of the processing of a modulated (spread spectrum) signal in accordance with an embodiment of the invention;

FIG. 7 is a block diagram of an embodiment of a portion of a receiver unit that can be used to receive and demodulate a physical channel, including one transmitted from multiple transmit antennas in the STTD mode of the W-CDMA standard;

FIG. 8 is a block diagram of an embodiment of a finger element that can be used to implement one of the finger elements in FIG. 7; and

FIG. 9 is a diagram that illustrates the processing of two symbols using an actual OVSF code and a hypothesized OVSF code.

DETAILED DESCRIPTION OF THE SPECIFIC EMBODIMENTS

FIG. 1 is a diagram of a spread spectrum communications system 100 that supports a number of users. System 100 provides communication for a number of cells 102a through 102g, with each cell 102 being serviced by a corresponding base station 104. Various remote stations 106 are dispersed throughout the system. In an embodiment, each remote station 106 communicates with one or more base stations 104 on the downlink and uplink at any given moment, depending on whether the remote station is in soft handoff. The downlink refers to transmission from the base station to the remote station, and the uplink refers to transmission from the remote station to the base station. The downlink and uplink respectively correspond to the forward link and reverse link in the IS-95 CDMA system. System 100 may be designed to support one or more CDMA standards, such as the IS-95 standard, the W-CDMA standard, other standards, or a combination thereof.

As shown in FIG. 1, base station 104a transmits data to remote stations 106a and 106j on the downlink, base station 104b transmits data to remote stations 106b and 106j, base station 104c transmits data to remote station 106c, and so on. In FIG. 1, the solid line with the arrow indicates a transmission from

the base station to the remote station. A broken line with the arrow indicates that the remote station is receiving the pilot signal, but no user-specific data transmission, from the base station. The uplink communication is not shown in FIG. 1 for simplicity.

5 In certain transmission modes in the W-CDMA standard, a remote station can receive multiple transmissions from multiple antennas of a single base station for certain physical channel types including the (physical) downlink shared channel (DSCH). As shown in FIG. 1, remote station 106a receives multiple transmissions from base station 104a, remote station 106d receives multiple transmissions from base station 104d, and remote station 106f receives multiple transmissions from base station 104f.

FIG. 2 is a simplified block diagram of an embodiment of the signal processing for a downlink physical channel. At the transmitter unit, data is sent, typically in packets, from a data source 212 to an encoder 214. Encoder 214 performs a number of functions, depending on the particular CDMA system or standard being implemented. Such encoding functions typically include formatting each data packet with the necessary control fields, cyclic redundancy check (CRC) bits, and code tail bits. Encoder 214 then encodes one or more formatted packets with a particular coding scheme and interleaves (or reorders) the symbols within the encoded packets. Encoder 214 also performs rate matching of the packet (e.g., by repeating or puncturing the data).

The interleaved packet is provided to a modulator (MOD) 216 and may be scrambled with a scrambling sequence (for an IS-95 CDMA system), covered with a channelization code, and spread with spreading codes (e.g., short PNI and PNQ codes). The spreading with the spreading codes is referred to as "scrambling" by the W-CDMA standard. The channelization code can be an orthogonal variable spreading factor (OVSF) code (for a W-CDMA system), a Walsh code (for an IS-95 CDMA system), or some other orthogonal code, again depending on the particular CDMA system or standard being implemented. The spread data is then provided to a transmitter (TMTR) 218 and quadrature modulated, filtered, and amplified to generate one or more downlink signals. The downlink signal(s) are transmitted over the air from one or more antennas 220. The downlink processing is described in further detail in the IS-95 and W-CDMA standards.

35 At the receiver unit, the downlink signal(s) are received by an antenna 230 and routed to a receiver (RCVR) 232. Receiver 232 filters, amplifies, quadrature demodulates, and samples and quantizes the received signal. The digitized samples are then provided to a demodulator (DEMOD) 234 and

despreaded (or descrambled) with despreading codes, may be descrambled with a descrambling code (for the IS-95 CDMA system), and discovered with a channelization code for each physical channel being processed. The despreading, descrambling, and channelization codes correspond to the codes
5 used at the transmitter unit. The demodulated data is then provided to a decoder 236 that performs the inverse of the functions performed at encoder 214 (e.g., the de-interleaving, decoding, and CRC check functions). The decoded data is provided to a data sink 238.

A controller 240 can direct the operation of demodulator 234 and
10 decoder 236. A memory unit 242 couples to demodulator 234 (and possibly also to controller 240, as indicated by the dashed line) and, in certain modes of operation, can be used to store intermediate results, or data, from demodulator 234.

The block diagram, as described above, supports transmissions of
15 packet data, messaging, voice, video, and other types of communication on the downlink. A bi-directional communications system also supports uplink transmission from the remote station to the base station. However, the uplink processing is not shown in FIG. 2 for simplicity.

FIG. 3A is a block diagram of a modulator 300, a transmitter 302, and
20 antennas 304 that support transmission of a physical channel over two antennas. The processing units shown in FIG. 3A can be used to support a space time block coding transmit antenna diversity (STTD) mode defined by the W-CDMA standard. The data for the physical channel (i.e., the channel data) is provided to a STTD encoder 310 that generates STTD encoded data for
25 each of the antennas used to transmit the channel data. The operation of STTD encoder 310 is described in further detail below. The STTD encoded data for each antenna is provided to a respective channelizer 320 that covers the data with a channelization code assigned to the physical channel to generate "channelized" data. In the W-CDMA system, the same channelization code is
30 used for both antennas.

Covering is used to channelize data such that the data on multiple physical channels can be optimally transmitted and received without interfering with each other. Each physical channel is assigned a particular channelization code selected from a set of channelization codes. The codes in
35 the set are typically designed to be orthogonal with each other such that a particular code multiplied with itself and integrated over the length of the code will result in a high (energy) value, but if multiplied with other codes in the set

and integrated over the code length will result in a low (or ideally, zero) value. Non-orthogonal channelization codes can also be used for the covering.

To perform covering, the channel bits to be transmitted are multiplied with the assigned channelization code. At the receiver, the transmitted bits are recovered by multiplying the received samples with the same code used to cover the bit and integrating over the length of the code. Only the bit that had been covered with the code used for discovering will result in a high value, and the bits from other physical channels that had been covered with other codes will integrate to a value close to zero.

Within channelizer 320, the STTD encoded data is provided to an I/Q demultiplexer (DEMUX) 322 that demultiplexes the data into inphase (I) and quadrature (Q) data. The I data and Q data are provided to respective multipliers 324a and 324b and covered (i.e., multiplied) with the channelization code, C_d , assigned to the physical channel. Multipliers 324a and 324b perform covering using the channelization code in similar manner as the covering performed with Walsh code in the IS-95 CDMA system.

For an IS-95 CDMA system, Walsh codes having a fixed length of 64 chips are used to cover the traffic channels, with each physical channel having a variable but limited data rate (e.g., ≤ 32 kbps). W-CDMA uses orthogonal codes called OVSF codes that are identical to Walsh codes except that the index identifying the code is bit-reversed (e.g., for a length 64 code, Walsh code (64,5) (5 = b000101) would be OVSF code (64,40) (40 = b101000)). W-CDMA uses OVSF codes with length that varies from 4 to 512 chips and is dependent on the data rate of the physical channel. OVSF codes are described in further detail below.

The covered Q data from multiplier 324b is provided to a multiplier 326 and multiplied with the complex symbol, j , to generate the imaginary part of the channelized data. The real part from multiplier 324a and the imaginary part from multiplier 326 are combined by an adder 328 to provide the complex channelized data. The channelized data for each antenna is then scrambled with a complex scrambling code, PN, by a multiplier 328 and scaled with a weight factor, G , by a multiplier 330. The weight factor, G , is selected for the physical channel being processed and is used to adjust the transmit power of the physical channel.

The scrambled and weighted data from multiplier 332b, the scrambled and weighted data for other physical channels, and other data for some other physical channels (e.g., the common control physical channel) are combined by an adder 334 to generate composite data. The composite data for each antenna

is further multiplied with a complex weight factor, W , by a multiplier 336. As specified in the W-CDMA standard, the weight factor is used for phase adjustment in closed loop mode 1 and for phase/amplitude adjustment in closed loop mode 2.

5 The adjusted data from each multiplier 336 is then provided to a respective transmitter 302 that converts the data into an RF modulated signal, which is then transmitted from a respective antenna 304.

FIG. 3B is a block diagram of an embodiment of a portion of transmitter 302. The composite data from modulator 300, having complex-values, is provided to a real/imaginary demultiplexer (Re/Im DEMUX) 352 that demultiplexes the data into the real and imaginary parts. The real and imaginary parts are then filtered by respective pulse shape filters 354a and 354b. The filtered real and imaginary parts are modulated with respective carrier signals $\cos(\omega_c t)$ and $-\sin(\omega_c t)$ by multipliers 356a and 356b to generate inphase and quadrature modulated components that are then combined by an adder 358 to generate a modulated signal. The modulated signal is typically conditioned prior to transmission from antenna 304.

FIG. 4A is a diagram that illustrates the encoding performed by STTD encoder 310. The channel data comprises a sequence of bits represented as $\{b_0, b_1, b_2, b_3, b_4, b_5, b_6, b_7, \dots\}$. In the STTD mode of the W-CDMA system, the input bit sequence is transmitted from two or more antennas. For example, each antenna can be substituted by a phased array antenna consisting of multiple antennas having a particular beam pattern. The STTD scheme is designed for two diverse paths (regardless of the number of physical antennas employed).

25 STTD encoder 310 receives the input bit sequence and generates a number of output bit sequences, one output bit sequence for each antenna used to transmit the channel data (two output bit sequences are generated in the example shown in FIG. 4A). In accordance with the W-CDMA standard, the first output bit sequence for antenna 1 is a replica of the input bit sequence, and the second output bit sequence for antenna 2 contain the same bits, but the order of the bits is rearranged in time and some of the bits are inverted.

30 The STTD encoding to generate the second output bit sequence is performed by first partitioning the input bit sequence into blocks of four bits. The bit in the third bit position of each block (e.g., b_2) is swapped with the bit in the first bit position (e.g., b_0), and the bit in the fourth bit position (e.g., b_3) is swapped with the bit in the second bit position (e.g., b_1). The bits in the first and fourth bit positions in the block (e.g., b_1 and b_2) are also inverted in the second output bit sequence.

FIG. 4B is a diagram that illustrates the encoding performed by STTD encoder 310 using complex notation. Prior to transmission, the output bit sequences from STTD encoder 310 are provided to respective transmitters. In each transmitter, the bit sequence is demultiplexed into an inphase (I) sequence and a quadrature (Q) sequence. For antenna 1, the transmitter input bit sequence $\{b_0, b_1, b_2, b_3, b_4, b_5, b_6, b_7, \dots\}$ is demultiplexed into the I sequence $\{b_0, b_2, b_4, b_6, \dots\}$ and the Q sequence $\{b_1, b_3, b_5, b_7, \dots\}$. The I and Q sequences for antenna 1 can also be viewed as a complex symbol sequence $\{S_0, S_1, S_2, S_3, \dots\}$, where $S_0 = b_0 + jb_1, S_1 = b_2 + jb_3$, and so on.

Similarly, for antenna 2, the transmitter input bit sequence $\{-b_2, b_3, b_0, -b_1, -b_6, b_7, b_4, -b_5, \dots\}$ is demultiplexed into the I sequence $\{-b_2, b_0, -b_6, b_4, \dots\}$ and the Q sequence $\{b_3, -b_1, b_7, -b_5, \dots\}$. The I and Q sequences for antenna 2 can be viewed as a complex symbol sequence $\{-S_1^*, S_0^*, -S_3^*, S_2^*, \dots\}$, where $-S_1^* = -b_2 + jb_3, S_0^* = b_0 - jb_1$, and so on. S_0^* represents the complex conjugate of S_0 .

Transmission of the channel data over two or more antennas provides spatial diversity, which can improve performance against deleterious path effects. Rearranging the order of the bits in at least one of the transmissions provides temporal diversity, which can improve performance against impulse noise and interference. The bit inversion is used to allow the receiver unit to separate out the streams from the two antennas and consequently take advantage of the path diversity.

In accordance with the W-CDMA standard, the downlink shared channel (DSCH) can be used to transmit data at a variable bit rate ranging from 15 Kbps up to 1.92 Mbps. For the W-CDMA standard, the bit rate refers to the rate of the bits provided to modulator 216, i.e., after encoding, interleaving, and rate matching but before covering, spreading, and so on. The OVSF codes used to cover (and channelize) the data has a fixed chip rate (i.e., 3.84 Mcps for W-CDMA) but a variable length ranging from four chips to 512 chips. The length of the OVSF code is also referred to as the spreading factor, SF. Table 1 lists the bit rates (in Kbps) supported by W-CDMA and the corresponding OVSF code lengths (in chips).

Table 1

Channel Bit Rate (Kbps)	OVSF Code Length (chips)
15	512
30	256
60	128

10

120	64
240	32
480	16
960	8
1920	4

As shown in Table 1, the OVFSF code has a maximum length of 512 chips for the lowest supported bit rate of 15 Kbps and a minimum length of 4 chips for the highest supported bit rate of 1.92 Mbps.

- 5 FIG. 5 is a diagram that illustrates the generation of the OVFSF codes. Each OVFSF code can be identified by the designation, $C_{SF,i}$, where SF is the spreading factor (which is equal to the length of the code) and i is the identity of the particular code (i.e., $i = 0, 1, 2, \dots, SF-1$) for that spreading factor. The OVFSF codes are "structured" codes, and successively longer OVFSF codes can be
- 10 generated from shorter OVFSF codes in accordance with a set of rules. To generate OVFSF codes of a longer length (i.e., C_{2x}), each immediately shorter length OVFSF code (i.e., C_x) is used to generate two new OVFSF codes. The first new OVFSF code is generate by repeating the shorter length OVFSF code twice (i.e., $C_{2x,2i} = C_{x,i}, C_{x,i}$), and the second new OVFSF code is generate by repeating the
- 15 shorter length code twice and inverting the second repetition (i.e., $C_{2x,2i+1} = C_{x,i}, -C_{x,i}$).

- As shown in FIG. 5, only one OVFSF code is defined for a code length of one (i.e., $C_{1,0} = 1$). Two OVFSF codes are defined for a code length of two (i.e., $C_{2,0} = 1,1$ and $C_{2,1} = 1,-1$), and are generated from the OVFSF code of length 1 (i.e., $C_{1,0}$). Similarly, four OVFSF codes are defined for a code length of four, with the
- 20 OVFSF codes ($C_{4,0} = 1,1,1,1$) and ($C_{4,1} = 1,1,-1,-1$) being generated from the OVFSF code ($C_{2,0} = 1,1$) and the OVFSF codes ($C_{4,2} = 1,-1,1,-1$) and ($C_{4,3} = 1,-1,-1,1$) being generated from the OVFSF code ($C_{2,1} = 1,-1$).

- In accordance with the W-CDMA standard, each user in communication
- 25 with the base station is typically assigned a dedicated channel (DCH) on the downlink and may be assigned/allocated a downlink shared channel (DSCH) as needed for packet data transmission. The parameters for the dedicated channel are either negotiated or may be known to the receiver unit at the time communication is established. For example, for the dedicated channel, the
- 30 channelization code is known but other parameters such as rate matching parameters may or may not be known. If the parameters are not known at the time communication is established, a transport format combination indication (TFCI) is used to indicate the unknown transport format.

However, in part because of the dynamic nature of the downlink shared channel, its channelization code is typically not known a priori but provided instead on the dedicated channel. The transport format includes various parameters associated with the downlink shared channel such as, for example, the particular OVSF code assigned to the channel, the bit rate, and so on. The transport format of the downlink shared channel and the transport formats of other physical channels are combined into a transport format combination (TFC) and encoded into a TFCI that is transmitted to the receiver unit on the dedicated channel. The TFCI and its coding and transmission are described in detail in the W-CDMA standard.

Upon detection of the TFCI in the dedicated channel, the receiver unit is able to determine the transport formats for the individual physical channels, including that of the downlink shared channel. The receiver unit is then able to demodulate and decode the downlink shared channel.

In some instances, the TFCI is transmitted on the dedicated channel approximately concurrently with the data transmission on the downlink shared channel. Furthermore, because of the processing delay to demodulate and decode the dedicated channel, the TFCI may not be known until a short time after reception of the data transmission on the shared channel. The transport format information necessary to demodulate and decode the shared channel may therefore not be available in real-time. The invention provides techniques to efficiently process the data transmission when the actual OVSF code is not known.

FIG. 6 is a flow diagram of the processing of a modulated (spread spectrum) signal in accordance with an embodiment of the invention. Initially, the modulated signal is received, conditioned, and digitized to generate samples, at step 612. The samples may thereafter be processed by a number of finger elements, with each finger element assigned to process a particular signal path (i.e., multipath) of the received signal.

For each finger element, the samples are despread with a PN sequence at a time offset corresponding to the multipath being processed, at step 614. A hypothesized OVSF code is then identified for use in discovering the despread samples, at step 616. The hypothesized OVSF code is a code that can be used to generate the actual OVSF code used to cover the data at the base station, and is described in further detail below. If the received signal is from more than one base station and different actual OVSF codes are used at the transmitting base stations, then different hypothesized OVSF codes may be used for different finger elements.

For each finger element, the despread samples are then deconvolved with the hypothesized OVSF code, and may further be coherently demodulated with pilot estimates, if available, to generate partially processed symbols, at step 618. The partially processed symbols represent a portion of the actual symbol or the entire actual symbol, depending on the relationship between the hypothesized and actual OVSF codes, as described in further detail below. The partially processed symbols from all assigned finger elements are then appropriately weighted and combined to generate combined symbols, or intermediate results, at step 622. The intermediate results may be stored to a buffer until the actual OVSF code is known.

At step 624, the actual OVSF code is determined. The intermediate results may then be retrieved from the buffer and further processed. Specifically, the intermediate results for each symbol period (i.e., each actual OVSF code length) are scaled and combined to generate the final result for that symbol period, at step 626. The scaling is dependent on the relationship between the hypothesized and actual OVSF codes, as described below. The final result represents an estimate of the transmitted symbol. For STTD decoding in the W-CDMA system, the final results from multiple symbol periods are scaled and combined, in a complementary manner to the STTD encoding performed at the base station, to generate recovered symbols, at step 628. The processing shown in FIG. 6 is described in further detail below.

FIG. 7 is a block diagram of an embodiment of a portion of a receiver unit 700 that can be used to receive and demodulate a physical channel, including one transmitted from multiple transmit antennas in the STTD mode of the W-CDMA standard. One or more RF modulated signals from one or more transmit antennas are received by an antenna 710 and provided to a receiver (RCVR) 712 that conditions (e.g., amplifies, filters, and so on) the received signal and quadrature downconverts the conditioned signal to an intermediate frequency (IF) or baseband. Receiver 712 also samples and quantizes the downconverted inphase and quadrature signals to generate received samples that are then provided to a rake receiver 720. Although a rake receiver is shown in FIG. 7 for processing the physical channel, other receiver structures and implementations can also be used and are within the scope of the present invention.

In typical implementations, the received signal is sampled at a sample rate, f_s , that is higher than the chip rate, f_c , of the received signal. For example, the chip rate may be $f_c = 1.2288$ Mcps for the IS-95 CDMA system (or 3.84 Mcps for the W-CDMA system) but the sample rate may be, for example, 8 times (i.e.,

8xchip), 16 times (i.e., 16xchip), 32 times (i.e., 32xchip), or other multiple of the chip rate. The higher sample rate allows for fine adjustment of the timing to "zoom in" on a path position.

As shown in FIG. 7, rake receiver 720 includes a searcher element 722 and a number of finger elements 730a through 730n. Each of these elements receives the samples from receiver 712 and performs the tasks associated with the element or as directed by a controller 740. For example, searcher element 722 may be instructed by controller 740, or assigned to search for strong instances of the received signal. The strong signals may be present at different time offsets, and can be identified by searcher element 722 by processing the samples with different parameters (e.g., different PN codes, different time offsets, and so on). Searcher 722 may be designed to provide data corresponding to the searched signal or an indication of the search result to controller 740. Controller 740 assigns finger elements 730 to demodulate the strongest instances of the received signal, as determined with the assistance of searcher element 722.

Each assigned finger element 730 performs demodulation of one physical channel for one instance of the received signal (i.e., a signal at a particular assigned time offset), as directed by controller 740. When the channelization code is known, each assigned finger element 730 provides recovered symbols (e.g., S_A) corresponding to the assigned instance of the received signal. The recovered symbols from all assigned finger elements 730 are then provided to a combiner 732 and combined to provide composite symbols that are more indicative of the transmitted data. The combined symbols represent the recovered channel data, and are provided to the subsequent processing block (e.g., the decoder).

In accordance with the invention, in instances where the channelization code is not known, each assigned finger element 730 provides partially processed symbols corresponding to the assigned instance of the received signal (i.e., the assigned signal path). Each partially processed symbol can represent one recovered symbol or a fraction of one recovered symbol, depending on a hypothesized channelization code used to process the received samples and the actual channelization code. The partially processed symbols from various assigned finger elements 730 may also be combined to provide combined symbols more indicative of the transmitted data. The combined symbols from the combiner represent "intermediate results" that can be provided to, and stored by, a memory 742. The intermediate results are later retrieved and may further be processed, when the actual channelization code is

known, to provide the recovered symbols representative of the recovered channel data. Processing with the hypothesized channelization code and post-processing of the intermediate data are described in further detail below.

The design and operation of a rake receiver for an CDMA system is described in further detail in U.S. Patent No. 5,764,687, entitled "MOBILE DEMODULATOR ARCHITECTURE FOR A SPREAD SPECTRUM MULTIPLE ACCESS COMMUNICATION SYSTEM," and U.S. Patent No. 5,490,165, entitled "DEMODULATION ELEMENT ASSIGNMENT IN A SYSTEM CAPABLE OF RECEIVING MULTIPLE SIGNALS," both assigned to the assignee of the present invention and incorporated herein by reference.

Although not shown in FIG. 7 for simplicity, each finger element can also include a lock detector that computes a quality indicator (e.g., an average energy) of the recovered data at the finger element and masks the partially processed symbols from the finger element if the quality indicator does not exceed a minimum threshold. The masking ensures that only finger elements receiving signal of sufficient strength and reliability will contribute to the combined output, thus enhancing the quality of the recovered data.

FIG. 8 is a block diagram of an embodiment of a finger element 800 that can be used to implement one finger element 730 in FIG. 7. The finger element is also referred to as a demodulation element. The received samples from receiver 712 are provided to a multiplier 812 and descrambled with a complex descrambling code, PN, corresponding to the scrambling code used at the transmitter unit and having a time offset assigned to the finger element. The descrambled samples are then provided to a set of multipliers 814a through 814c.

The descrambled samples include data for all physical channels in the received signal, including pilot data, control data, and data transmitted on the dedicated and shared channels. Separation of these various types of data is achieved at the transmitter unit by (1) channelizing each channel data with an OVSF code assigned for the particular channel, (2) time multiplexing the data, or (3) a combination of both.

In accordance with the W-CDMA standard, for closed loop mode 1, orthogonal pilots are used for the two transmit antennas. The orthogonal pilots for the two antennas are generated by using different symbol patterns, W_{p1} and W_{p2} . Thus, at the receiver unit, the pilots are recovered by multipliers 814a and 814b using the same symbol patterns, W_{p1} and W_{p2} . The pilot samples from multipliers 814a and 814b are then provided to respective accumulators 816a and 816b and accumulated over the length of the symbol patterns to obtain

values indicative of the instantaneous phase and amplitude of the pilots. The instantaneous pilot values from accumulators 816a and 816b are then provided to respective pilot processors 818a and 818b.

The received pilot data is filtered and processed (e.g., interpolated or extrapolated, depending on the type of signal processing employed) to generate pilot estimates, \bar{P}_1 and \bar{P}_2 , used to demodulate the data. The despread pilot samples may also be provided to a pilot detector (DET) 822 that provides an indication of the quality of the received pilots. In a specific implementation, pilot detector 822 measures the power of the received pilots and provides a pilot quality estimate, \bar{P} .

In similar manner, the descrambled samples from multiplier 812 are provided to a multiplier 814c and deconvolved with either the actual OVFSF code, C_a , (if it is known) or a hypothesized OVFSF code, C_h , (if the actual OVFSF code is not known) to recover the data on the physical channel. The samples from multiplier 814c are then provided to an accumulator 816c and accumulated over the length of the OVFSF code, C_a or C_h , used to deconvolve the samples. If the actual OVFSF code, C_a , for the physical channel being processed is known, accumulator 816c accumulates the samples over the length of the code to generate a received symbol. For example, referring back to Table 1, if the bit rate of the physical channel is 1.92 Mbps, accumulator 816c accumulates the samples over a four-chip period to provide a received symbol. On the other extreme, if the bit rate of the physical channel is 7.5 kbps, accumulator 816c accumulates the samples over a 512-chip period to provide a received symbol. The deconvolved symbols from accumulator 816c may be delayed by a delay element 828 to match the delay of pilot processors 818.

In accordance with the invention, when the actual OVFSF code is not known, the deconvolving is performed using the hypothesized OVFSF code, C_h , having a spreading factor that may be less than that of the actual OVFSF code. The accumulation by accumulator 816c is then performed for a time period corresponding to the length of the hypothesized OVFSF code. Thus, each deconvolved symbols from accumulator 816c may be only a portion of an actual received symbol.

The pilot estimates, \bar{P}_1 and \bar{P}_2 , from pilot processors 818a and 818b and the deconvolved symbols from delay element 828 are provided to a data recovery element 830 that performs the necessary computations to generate the partially processed symbols for the finger element. In particular, data recovery element 830 may perform a dot product and a cross product between the pilot estimates and the deconvolved symbols to generate the partially processed symbols. The

dot and cross products refer to the operations $X_I P_I + X_Q P_Q$ and $X_I P_Q - X_Q P_I$, respectively, where the I and Q components of the discovered data symbol are respectively X_I and X_Q , and the I and Q components of the estimated pilot are respectively P_I and P_Q . The data recovery process may further involve rotation and/or scaling of either or both of the discovered data symbol and estimated pilot, as is known to those skilled in the art.

In FIG. 8, multipliers 814a and 814b, accumulators 816a and 816b, and pilot processors 818a and 818b may be referred to as the pilot processing unit of the finger element. For a mode in which pilot data is transmitted from only one antenna, only one of the pilot processing paths is needed and the other pilot processing path can be disabled. Multiplier 814c, accumulator 816c, and delay element 828 may be referred to as the data processing unit of the finger element.

The physical channel being processed may be transmitted from one antenna or two antennas (e.g., for the STTD mode in the W-CDMA system). Moreover, the physical channel may be modulated using either BPSK modulation (e.g., for an IS-95 CDMA system) or QPSK modulation (e.g., for a W-CDMA system).

In the STTD mode of the W-CDMA system, two RF modulated signals are transmitted from two transmit antennas for one physical channel. Each of the RF modulated signals can experience independent and different path loss. The received signal is thus a weighted sum of the two RF modulated signals, and can be expressed as:

$$X = \alpha S_{A1} + \beta S_{A2} ,$$

where X is the received symbol sequence $\{X_0, X_1, X_2, X_3, \dots\}$, S_{A1} is the symbol sequence $\{S_0, S_1, S_2, S_3, \dots\}$ transmitted from the first transmit antenna, S_{A2} is the symbol sequence $\{-S_1^*, S_0^*, -S_3^*, S_2^*, \dots\}$ transmitted from the second transmit antenna, and α and β are the fading coefficients for the two paths. The received symbols can be expressed as:

$$X_0 = \alpha S_0 - \beta S_1^* , \quad \text{Eq (1)}$$

$$X_1 = \alpha S_1 + \beta S_0^* , \quad \text{Eq (2)}$$

$$X_2 = \alpha S_2 - \beta S_3^* , \text{ and} \quad \text{Eq (3)}$$

$$X_3 = \alpha S_3 + \beta S_2^* . \quad \text{Eq (4)}$$

Equations 1 through 4 assume that the signals transmitted from antennas 1 and 2 are received at the finger element at approximately equal time, which is generally true in many instances. If the two paths are not received at the same time, then there may be some small degradation in performance, but the equations give above are still valid and the processing described herein can still be applied.

Because of time multiplexing of the symbols transmitted on the second transmit antenna, the received symbol sequence $\{X_0, X_1, X_2, X_3, \dots\}$ are further processed to recover the transmitted symbol sequence $\{S_0, S_1, S_2, S_3, \dots\}$. To determine an estimate of the transmitted symbol S_0 , equations 1 and 2 may be scaled and combined as follows:

$$\begin{aligned}\bar{S}_0 &= \bar{\alpha}^* X_0 + \bar{\beta} X_1^* \\ &= \bar{\alpha}^* (\alpha S_0 - \beta S_1^*) + \bar{\beta} (\alpha S_1 + \beta S_0^*) \\ &= \bar{\alpha}^* \alpha S_0 + \bar{\beta} (\beta S_0^*)^* - \bar{\alpha}^* \beta S_1^* + \bar{\beta} (\alpha S_1)^* \\ &= (|\alpha|^2 + |\beta|^2) S_0 + noise\end{aligned}$$

where \bar{S}_0 is the recovered symbol, $\bar{\alpha}$ and $\bar{\beta}$ are complex-valued estimates of the path losses (i.e., channel or fading coefficient) from the first and second transmit antennas, respectively, to the receive antenna. The noise term is due to imperfect channel estimation. Since the pilots are also transmitted from both transmit antennas, and the pilot data value is known, the pilot estimates described above can be used as the channel estimates, $\bar{\alpha}$ and $\bar{\beta}$, in the above equations. Similarly, to determine an estimate of the transmitted symbol S_1 , equations 1 and 2 may be scaled and combined as follows:

$$\begin{aligned}\bar{S}_1 &= -\bar{\beta} X_0^* + \bar{\alpha}^* X_1 \\ &= -\bar{\beta} (\alpha S_0 - \beta S_1^*)^* + \bar{\alpha}^* (\alpha S_1 + \beta S_0^*) \\ &= (|\alpha|^2 + |\beta|^2) S_1 + noise\end{aligned}$$

Thus, the recovered symbols, \bar{S}_0 and \bar{S}_1 , can be computed as:

$$\bar{S}_0 = (\bar{\alpha}^* X_0 + \bar{\beta} X_1^*), \text{ and} \quad \text{Eq (5)}$$

$$\bar{S}_1 = (-\bar{\beta} X_0^* + \bar{\alpha}^* X_1). \quad \text{Eq (6)}$$

To recover the data transmitted on the physical channel, it is necessary to discover the descrambled samples with the same OVSF code, C_d , used to channelize the physical channel at the transmitter. However, as noted above, the bit rate for the shared channel in the W-CDMA system is variable and the bit rate for a particular radio frame is provided on the dedicated channel, which may be transmitted approximately concurrently with the data.

Several techniques can be used to recover the data on a physical channel (such as the downlink shared channel in the W-CDMA system) having a variable but unknown bit rate (i.e., unknown OVSF code). In one technique, the descrambled samples are stored to memory and later retrieved for processing when information on the physical channel is known. Because of various factors (e.g., the size of the radio frame, the high bit rate, the higher resolution used to represent the unprocessed samples, and so on), a large memory is required to store the unprocessed samples. Also, descrambled samples are stored for all assigned finger elements.

In another technique, the descrambled data can be discovered for all possible OVSF codes (or all OVSF codes possible with the physical channel being processed). For example, the descrambled data can be discovered for OVSF code $C_{4,0} = 1,1,1,1$, OVSF code $C_{4,1} = 1,1,-1,-1$, and so on, concluding with OVSF code $C_{512,511} = 1,-1,-1,1,-1,1,-1,\dots$. Since there are almost 1024 possible OVSF codes, the brute force processing for all possible OVSF codes can be extensive and the implementation cost may be high. Thus, other techniques that can reduce the amount of necessary buffering and/or computation are highly desirable.

In accordance with the invention, if the actual OVSF code is not known, a hypothesized OVSF code is used to process the received samples. The actual OVSF code is the code that was actually used to channelize the physical channel being processed. Initially, a set of all OVSF codes that can be used to generate all possible actually used OVSF codes is determined. The OVSF code with the largest spreading factor within this set can then be selected as the hypothesized OVSF code. The hypothesized OVSF code is thus a "base" OVSF code that can be used to generate all possibilities of the actual OVSF code. The code tree for generating the OVSF codes has a known structure and this property of the OVSF code is exploited in the present invention. If the actual OVSF code is known to be a member of a set of possible codes, then the hypothesized OVSF code with the largest spreading factor that can be used to generate the possible codes in the set is used to discover the data.

For example, referring back to FIG. 5, if the actual OVFSF code has a spreading factor of 4 and it is known that the code is either $C_{4,0}$ or $C_{4,1}$, then the OVFSF code $C_{2,0}$ can be used to process the physical channel since $C_{2,0}$ can be used to generate $C_{4,0}$ and $C_{4,1}$. As another example, if the actual OVFSF code is known to be a member of a set that includes $C_{8,0}$ to $C_{8,3}$ and $C_{16,0}$ to $C_{16,7}$, then the OVFSF code $C_{2,0}$ can be used to process the physical channel. If the actual OVFSF code is known to be a member of a smaller code set that includes $C_{8,2}$ to $C_{8,3}$ and $C_{16,4}$ to $C_{16,7}$, then the OVFSF code $C_{4,1}$ having a larger spreading factor can be used to process the physical channel. The OVFSF code selected for use to process the physical channel is referred to as the hypothesized OVFSF code.

For a clearer understanding of the invention, the processing of the received samples using a hypothesized OVFSF code is now described for a specific example. In this example, the hypothesized OVFSF code is half the length of the actual OVFSF code.

FIG. 9 is a diagram that illustrates the processing of two symbols using the actual OVFSF code and the hypothesized OVFSF code. In this example, the filtered pilot received from the first antenna is denoted as α , the filtered pilot received from the second antenna is denoted as β , the received symbols processed using the actual OVFSF code are denoted as X_0 and X_1 , and the received symbols processed using the hypothesized OVFSF code are denoted as Y_{00} , Y_{01} , Y_{10} , and Y_{11} . Since the hypothesized OVFSF code is half the length of the actual OVFSF code, two symbols Y_{a0} and Y_{a1} are generated for each symbol X_a .

If the actual OVFSF code is known, the following terms can be computed for each finger element assigned to process a particular signal path:

$$\begin{aligned} &\alpha^* X_0, \\ &\alpha^* X_1, \\ &\beta X_0^*, \text{ and} \\ &\beta X_1^*. \end{aligned}$$

The terms from all assigned finger elements can be appropriately weighted and combined to obtain the following terms:

$$\begin{aligned} &\overline{\alpha^* X_0}, \\ &\overline{\alpha^* X_1}, \\ &\overline{\beta X_0^*}, \text{ and} \\ &\overline{\beta X_1^*}. \end{aligned}$$

where the symbol " $\overline{}$ " denotes the weighted sum for a particular term (e.g., $\alpha^* X_0$) across all assigned finger elements. For the STTD mode in the W-CDMA system, the transmitted symbols S_0 and S_1 can then be determined as:

$$\begin{aligned} S_0 &= \overline{\alpha^* X_0} + \overline{\beta X_1^*} , \text{ and} \\ 5 \quad S_1 &= -\overline{\beta X_0^*} + \overline{\alpha^* X_1} . \end{aligned}$$

However, if the actual OVSF code is not known, a hypothesized OVSF code can be generated and used for processing the received samples. For each assigned finger element, the following terms can be computed using the hypothesized OVSF code:

$$\begin{aligned} 10 \quad & \alpha^* Y_{00} , \quad \alpha^* Y_{01} , \\ & \alpha^* Y_{10} , \quad \alpha^* Y_{11} , \\ & \beta Y_{00}^* , \quad \beta Y_{01}^* , \text{ and} \\ & \beta Y_{10}^* , \quad \beta Y_{11}^* . \end{aligned}$$

Since the actual OVSF code is twice the length of the hypothesized OVSF code in this example, two pairs of partially processed symbols are generated for each transmitted symbol. The terms from all assigned finger elements can be appropriately weighted and combined to obtain the following terms:

$$\begin{aligned} 15 \quad & \overline{\alpha^* Y_{00}} , \quad \overline{\alpha^* Y_{01}} , \\ & \overline{\alpha^* Y_{10}} , \quad \overline{\alpha^* Y_{11}} , \\ 20 \quad & \overline{\beta Y_{00}^*} , \quad \overline{\beta Y_{01}^*} , \text{ and} \\ & \overline{\beta Y_{10}^*} , \quad \overline{\beta Y_{11}^*} . \end{aligned}$$

The above terms represent intermediate results that can be stored in a memory the actual OVSF code is determined. Once the actual OVSF code is known, the intermediate results can be retrieved from memory and appropriately combined as follows:

$$\begin{aligned} \overline{\alpha^* X_0} &= \overline{\alpha^* Y_{00}} + \overline{\alpha^* Y_{01}} , \\ \overline{\alpha^* X_1} &= \overline{\alpha^* Y_{10}} + \overline{\alpha^* Y_{11}} , \\ \overline{\beta X_0^*} &= \overline{\beta Y_{00}^*} + \overline{\beta Y_{01}^*} , \text{ and} \end{aligned}$$

$$\overline{\beta X_1^*} = \overline{\beta Y_{10}^*} + \overline{\beta Y_{11}^*} .$$

In the above example, a plus sign ("+") is used to combine the two "Y" terms to generate each "X" term. However, the "Y" terms may be scaled differently prior to the combining, with each "Y" term being scale with either a +1 or -1 depending on how the hypothesized OVSF code is scaled and concatenated to obtain the actual OVSF code. The transmitted symbols S_0 and S_1 can then be determined in similar manner described above, as follows:

$$S_0 = \overline{\alpha^* X_0} + \overline{\beta X_1^*} , \text{ and}$$

$$S_1 = -\overline{\beta X_0^*} + \overline{\alpha^* X_1} .$$

As illustrated by the above example, equations (5) and (6) cannot be executed in its entirety with the hypothesized OVSF code because the length of the symbols S_0 and S_1 is not known. For example, if the hypothesized OVSF code has a length of 4 chips and the actual OVSF code has a length of 8 chips, then each transmitted symbol lasts two hypothesized OVSF codes. As another example, if the actual OVSF code has a length of 16 chips, then each transmitted symbol lasts four hypothesized OVSF codes. With the invention, partial processing is performed using the hypothesized OVSF code and the intermediate results are later combined to provide the desired outputs.

For the simple example described above, the same pilot estimates, α and β , are used for all four symbols Y_{00} , Y_{01} , Y_{10} , and Y_{11} . However, it is also possible to use the most updated pilot estimates available at the time of the symbol being processed. In this case, instead of using a single set of α and β , four sets α_{00} and β_{00} through α_{11} and β_{11} can be used to process the symbols Y_{00} through Y_{11} , respectively.

Referring back to FIG. 8, each finger element processes one instance of the received signal to generate the partially processed symbols for that finger. Specifically, each finger despreads the received samples, discovers the despread samples using the hypothesized OVSF code, and demodulates the discovered symbols with the pilot estimates to generate the partially processed symbols.

The actual OVSF code may be made up of a concatenation of Q appropriately weighted (with either +1 or -1) hypothesized OVSF codes, depending on the pattern of the actual OVSF code. Thus, Q pairs of partially processed symbols are generated by each finger element for each transmitted symbol. For the W-CDMA system, Q can be 1, 2, 4, ... , or 128, depending on relationship between the actual and hypothesized OVSF codes. Each pair of partially processed

symbols thus corresponds to a portion of the transmitted symbol (for $Q = 2, 4, \dots$ or 128) or the entire transmitted symbol (for $Q = 1$). Each finger element computes the Q pairs of partially processed symbols as (α^*Y) and (βY^*) , with one pair of partially processed symbols generated for each hypothesized OVFSF code length.

For data transmission received from one base station, the same hypothesized OVFSF code is used for all assigned finger elements. As noted above, for data transmissions received from multiple base stations and covered with different actual OVFSF codes, different hypothesized OVFSF codes may be used to discover the received samples. For both cases, the partially processed symbols from all assigned finger elements are combined to generate the intermediate results.

The partially processed symbols from all assigned finger elements are then provided to combiner 732 and appropriated weighted and combined into combined symbols, which represent the intermediate results. Specifically, the partially processed symbols from all assigned finger elements for each hypothesized OVFSF code length are scaled and combined to generate the intermediate results for that hypothesized OVFSF code length. Again, Q pairs of intermediate results, $(\overline{\alpha^*Y_0})$ and $(\overline{\beta Y_0^*})$ through $(\overline{\alpha^*Y_{Q-1}})$ and $(\overline{\beta Y_{Q-1}^*})$, are generated for each transmitted symbol. The intermediate results are then provided to the next processing unit or stored.

Once the actual OVFSF code is known, the intermediate results can be retrieved and further processed, if necessary, to obtain the recovered symbols. As an example, if the physical channel was processed using a hypothesized OVFSF code $C_{2,0} = 1,1$ and the actual OVFSF code is $C_{4,1} = 1,1,-1,-1$, then the intermediate results are retrieved, appropriately inverted as defined by the actual OVFSF code, and integrated over the length of the actual OVFSF code to obtain the recovered symbols. For the above example, the second pair of intermediate results is inverted to account for the inversion in the second half of the $C_{4,1}$ code. The first set of intermediate results, corresponding to $(\overline{\alpha^*Y_0})$ through $(\overline{\alpha^*Y_{Q-1}})$, from the Q pairs are combined to obtain the term $(\overline{\alpha^*X})$. Similarly, the second set of intermediate results, corresponding to $(\overline{\beta Y_0^*})$ through $(\overline{\beta Y_{Q-1}^*})$, from the Q pairs are combined to obtain the term $(\overline{\beta X^*})$. These terms are then combined as shown in equations (5) and (6) to obtain the recovered symbols. Referring to FIG. 7, the processing of the intermediate results can be performed by controller 740, by circuitry within combiner 732, or by other circuitry not shown in FIG. 7.

The processing units described herein (e.g., multipliers 814, accumulators 816, pilot processors 818, data recovery element 830, controller 740, and others) can be implemented in various manners such as an application specific integrated circuit (ASIC), a digital signal processor, a microcontroller, a microprocessor, or other electronic circuits designed to perform the functions described herein. Also, the processing units can be implemented with a general-purpose or specially designed processor operated to execute instruction codes that achieve the functions described herein. Thus, the processing units described herein can be implemented using hardware, software, or a combination thereof.

The memory unit can be implemented memory technologies including, for example, random access memory (RAM), Flash memory, and others. The memory unit can also be implemented with storage element such as, for example, a hard disk, a CD-ROM drive, and others. Various other implementation of the memory unit are possible and within the scope of the present invention.

The foregoing description of the preferred embodiments is provided to enable any person skilled in the art to make or use the present invention. Various modifications to these embodiments will be readily apparent to those skilled in the art, and the generic principles defined herein may be applied to other embodiments without the use of the inventive faculty. Thus, the present invention is not intended to be limited to the embodiments shown herein but is to be accorded the widest scope consistent with the principles and novel features disclosed herein.

WHAT IS CLAIMED IS:

CLAIMS

1. A method for recovering data transmitted on a physical channel,
wherein a channelization code used for the physical channel is not known at
the time of the data recovery, the method comprising:
receiving and processing a modulated signal to provide received
samples;
selecting a hypothesized channelization code for processing the physical
channel;
processing the received samples with the hypothesized channelization
code to generate partially processed symbols;
storing intermediate results representative of the partially processed
symbols;
determining an actual channelization code used for the physical channel;
and
processing the intermediate results in accordance with the actual
channelization code and the hypothesized channelization code to provide final
results.

2. The method of claim 1, further comprising:
selectively combining the final results from multiple symbol periods to
obtain a recovered symbol, wherein each symbol period corresponds to
duration of the actual channelization code.

3. The method of claim 2, wherein the selectively combining is
performed in a manner complementary to an encoding performed in
accordance with a space time block coding transmit antenna diversity (STTD)
mode defined by W-CDMA standard.

4. The method of claim 1, wherein the processing the received samples
includes
discovering the received samples with the hypothesized channelization
code to generate discovered symbols, and
demodulating the discovered symbols with pilot estimates to generate
the partially processed symbols.

5. The method of claim 4, wherein the demodulating with the pilot
estimates includes

wherein the partially processed symbols are derived based on results of
8 the dot and cross products.

6. The method of claim 1, further comprising:
2 combining partially processed symbols from a plurality of demodulation
elements assigned to process the physical channel to generate the intermediate
4 results.

partitioning the intermediate results into sets of intermediate results,
4 scaling each intermediate result in a particular set with a respective
scaling factor determined by the actual channelization code and the
6 hypothesized channelization code, and

combining the scaled results for each set to obtain a final result for the
8 set.

8. The method of claim 7, wherein the scaling factor is either +1 or -1.

9. The method of claim 1, wherein the hypothesized channelization code
2 is a member of a set of channelization codes that may be used to generate the
actual channelization code, and wherein the hypothesized channelization code
4 has a length that is shorter or equal to that of the actual channelization code.

10. The method of claim 9, wherein the hypothesized channelization
2 code can be used to generate all channelization codes in the set.

11. The method of claim 9, wherein the hypothesized channelization
2 code is an orthogonal variable spreading factor (OVSF) code.

12. The method of claim 11, wherein the hypothesized OVSF code has a
2 largest spreading factor among the channelization codes in the set.

13. The method of claim 11, wherein the hypothesized OVSF code has a spreading factor of four or greater.

14. The method of claim 11, wherein the hypothesized OVSF code and the actual OVSF code each has a spreading factor ranging from four to 512.

15. The method of claim 4, wherein the pilot estimates are generated by despread the received samples with a pilot despread code, and integrating the despread pilot samples over a length of the pilot despread code to obtain the pilot symbols that are then used to generate the pilot estimates.

16. The method of claim 15, wherein the pilot estimates are generated by interpolating or extrapolating the pilot symbols.

17. The method of claim 1, wherein the physical channel has a variable data rate.

18. A method for recovering data transmitted on a physical channel, wherein at least one characteristic of the data transmission is not known at the time of the data recovering, the method comprising:

- receiving and processing a modulated signal to provide received samples;
- determining a hypothesized parameter value corresponding to an unknown characteristic of the data transmission;
- processing the received samples with the hypothesized parameter value to generate intermediate results;
- storing the intermediate results;
- determining an actual parameter value for the unknown characteristic;
- and
- further processing the intermediate results using the actual parameter value and the hypothesized parameter value to provide final results.

19. The method of claim 18, wherein the hypothesized parameter value corresponds to a channelization code used to channelize the data.

20. A receiver unit operative to process a physical channel in a CDMA communications system, comprising:

8 a data processing unit operative to receive and process the
received samples in accordance with a hypothesized channelization code
to provide discovered symbols;

12 a processor operative to receive and process the intermediate results in
accordance with an actual channelization code and the hypothesized
14 channelization code to generate final results.

4 a pilot processing unit operative to receive and process the
received samples to generate pilot estimates, and

a data recovery element coupled to the pilot processor and the data processing unit, the data recovery element operative to receive the pilot estimates and the discovered symbols and generate the partially processed symbols.

22. The receiver unit of claim 21, wherein the data recovery element is
 2 operative to receive and demodulate the discovered symbols with the pilot
 estimates to generate the partially processed symbols.

23. The receiver unit of claim 22, further comprising:
2 a combiner coupled to the at least one demodulator element and
operative to receive and combine partially processed symbols from one or more
4 assigned demodulator elements to generate the intermediate results.

24. A receiver unit operative to process a physical channel in a CDMA
2 communications system, comprising:

a receiver operative to receive a modulated signal and provide received
4 samples indicative of data transmitted on the physical channel;

a plurality of demodulator elements coupled to the receiver, each
6 demodulator element operative to receive and demodulate the received
samples with a particular set of parameters to provide respective partially

- 8 processed symbols, wherein one of the parameters in the set corresponds to a
hypothesized channelization code used to discover the received samples; and
10 a combiner coupled to the plurality of demodulator elements and
operative to receive and combine the partially processed symbols from the
12 plurality of demodulator elements to generate intermediate results that are
stored in the memory unit.

Techniques for recovering data transmitted on a physical channel in which the channelization code is not known at the time of the data recovery. A modulated signal is received and processed to provide received samples. A hypothesized channelization code (e.g., an OVSF code in the W-CDMA system) is selected and used to process the received samples to generate partially processed symbols. The hypothesized channelization code is a "base" code that can be used to generate all possible channelization codes that may have been used for the physical channel. Intermediate results representative of the partially processed symbols are stored and, upon determination of the actual channelization code, further processed in accordance with the actual and hypothesized channelization codes to provide the final results. The additional processing includes partitioning the intermediate results into sets, scaling each intermediate result in a particular set with a scaling factor (+1 or -1) determined by the actual and hypothesized channelization codes, and combining the scaled results in each set to obtain a final result. In the STTD mode in the W-CDMA system, the final results from multiple actual OVSF code intervals can be selectively combined to obtain a recovered symbol.

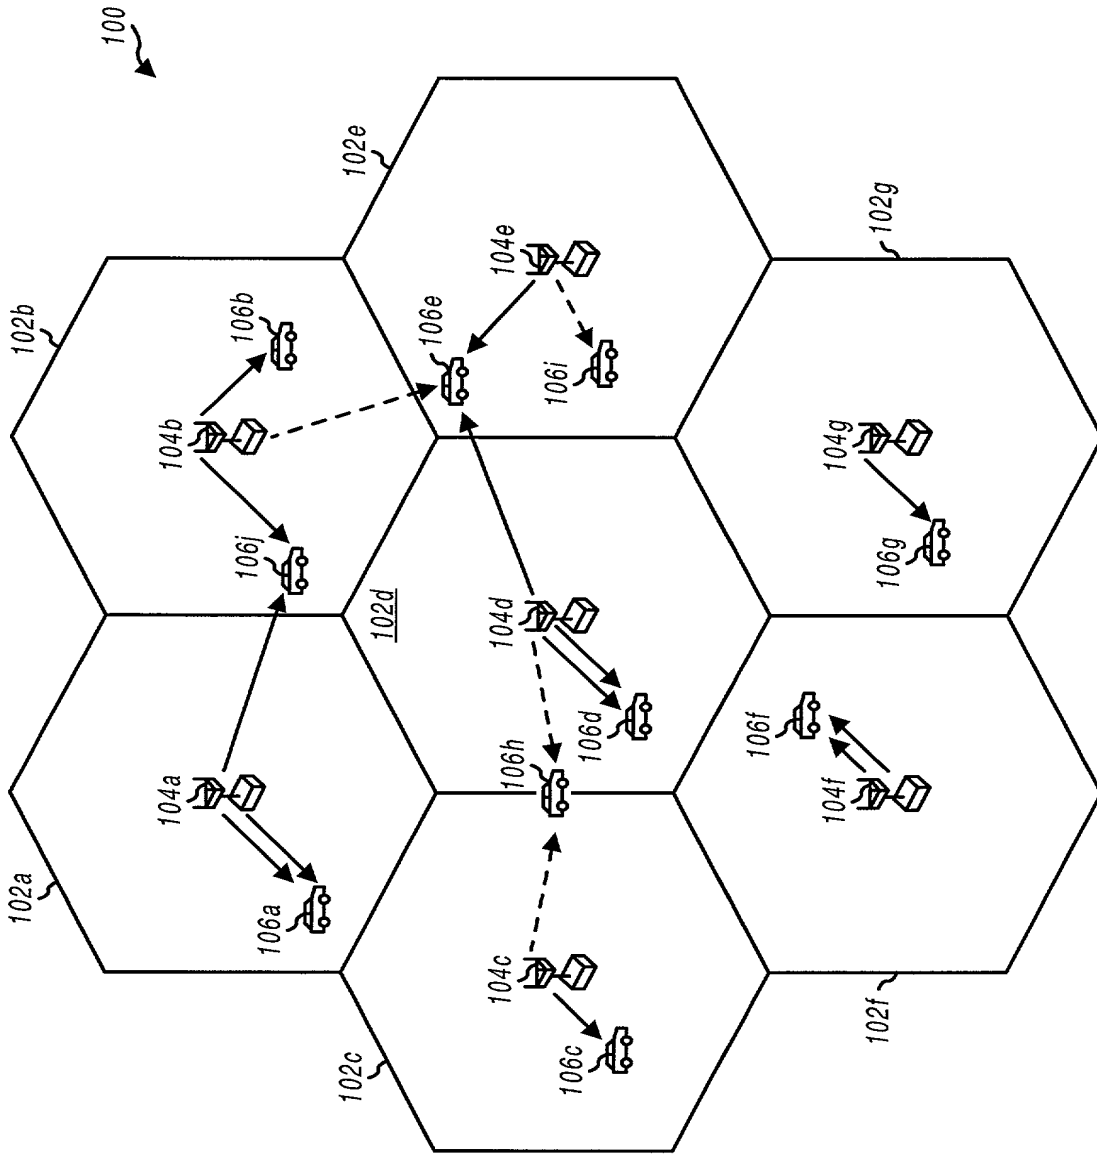


FIG. 1

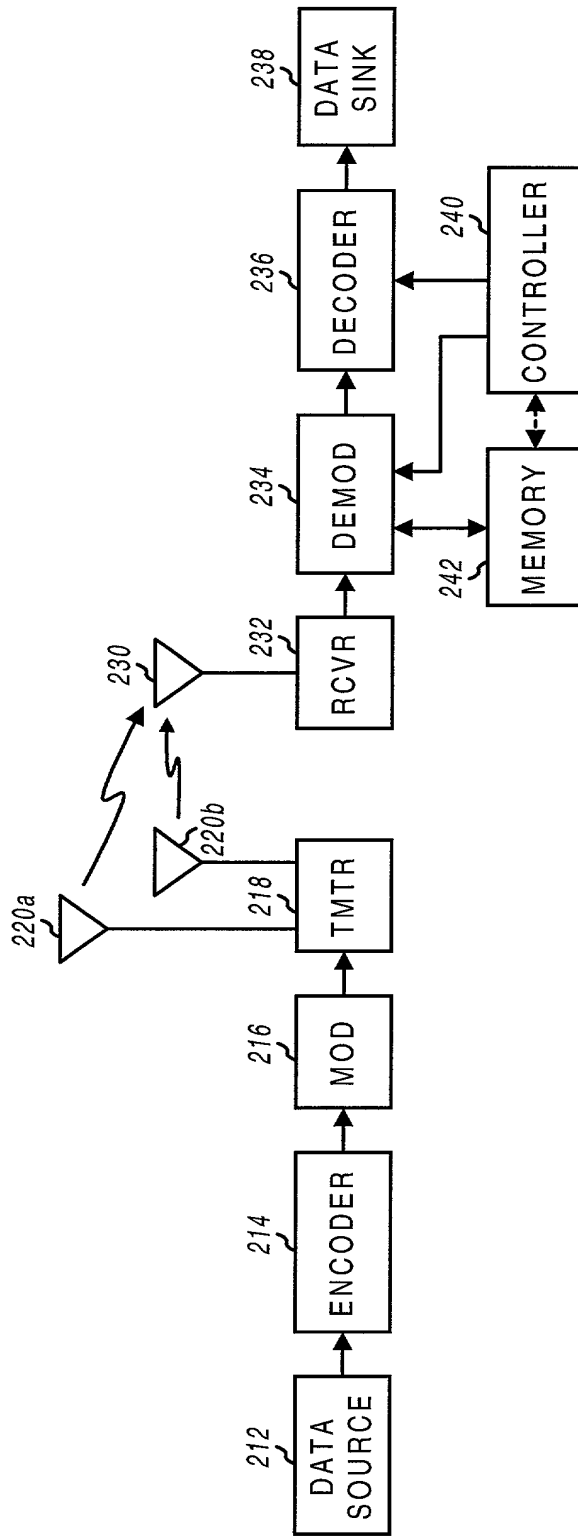


FIG. 2

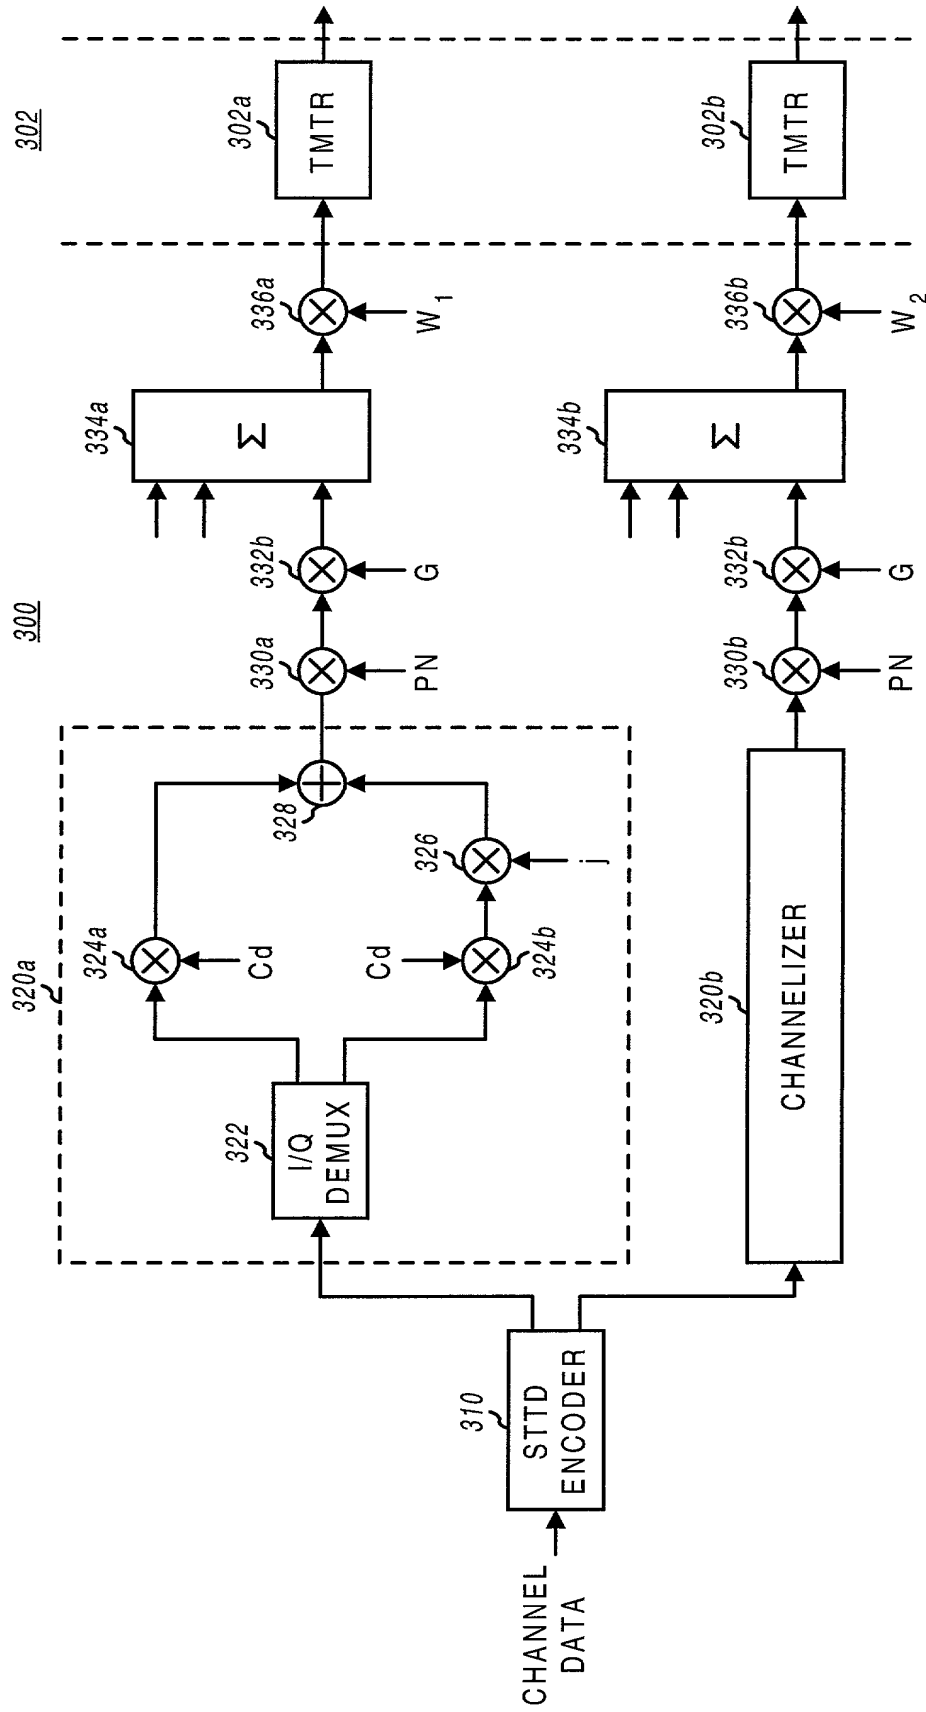


FIG. 3A

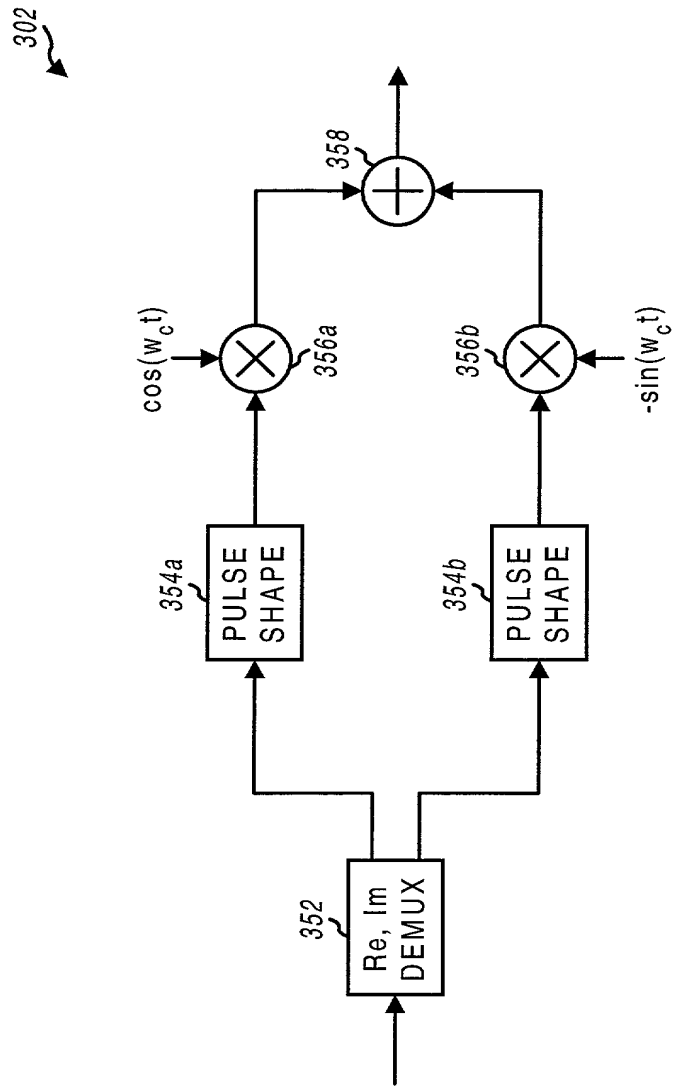


FIG. 3B

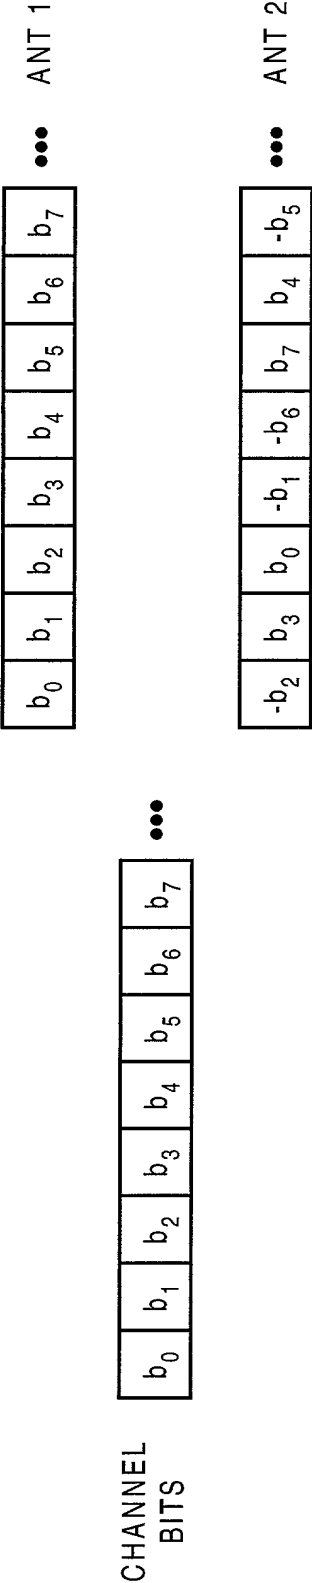


FIG. 4A

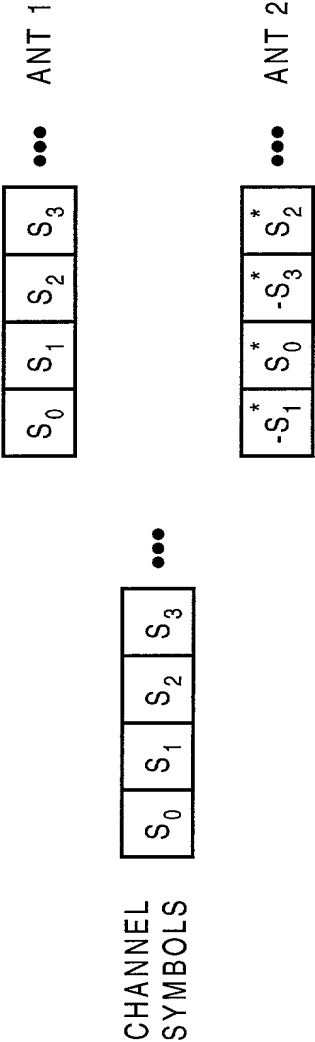


FIG. 4B

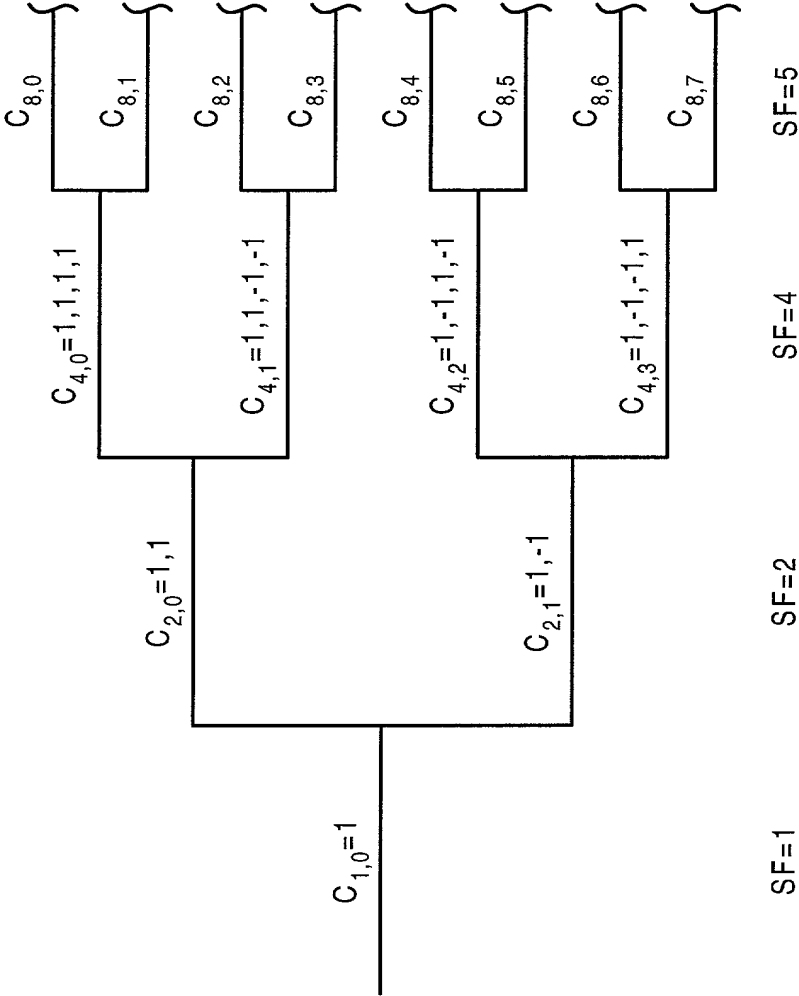
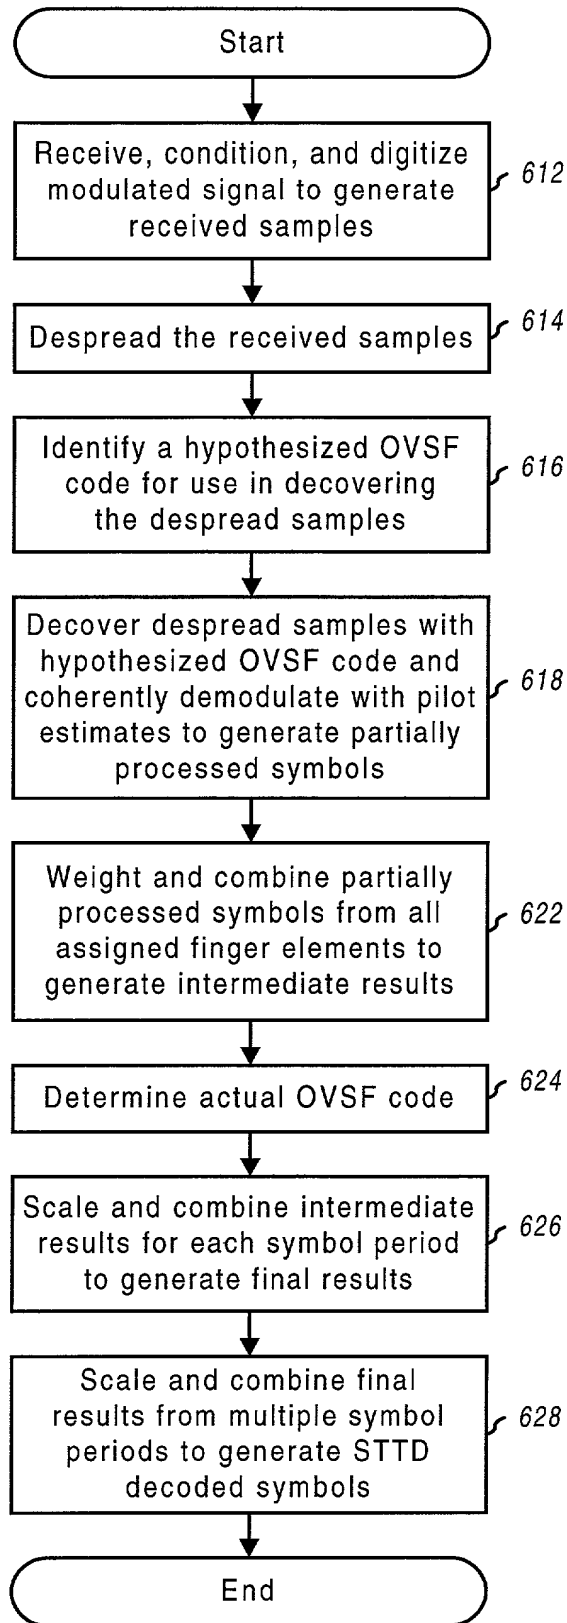


FIG. 5

**FIG. 6**

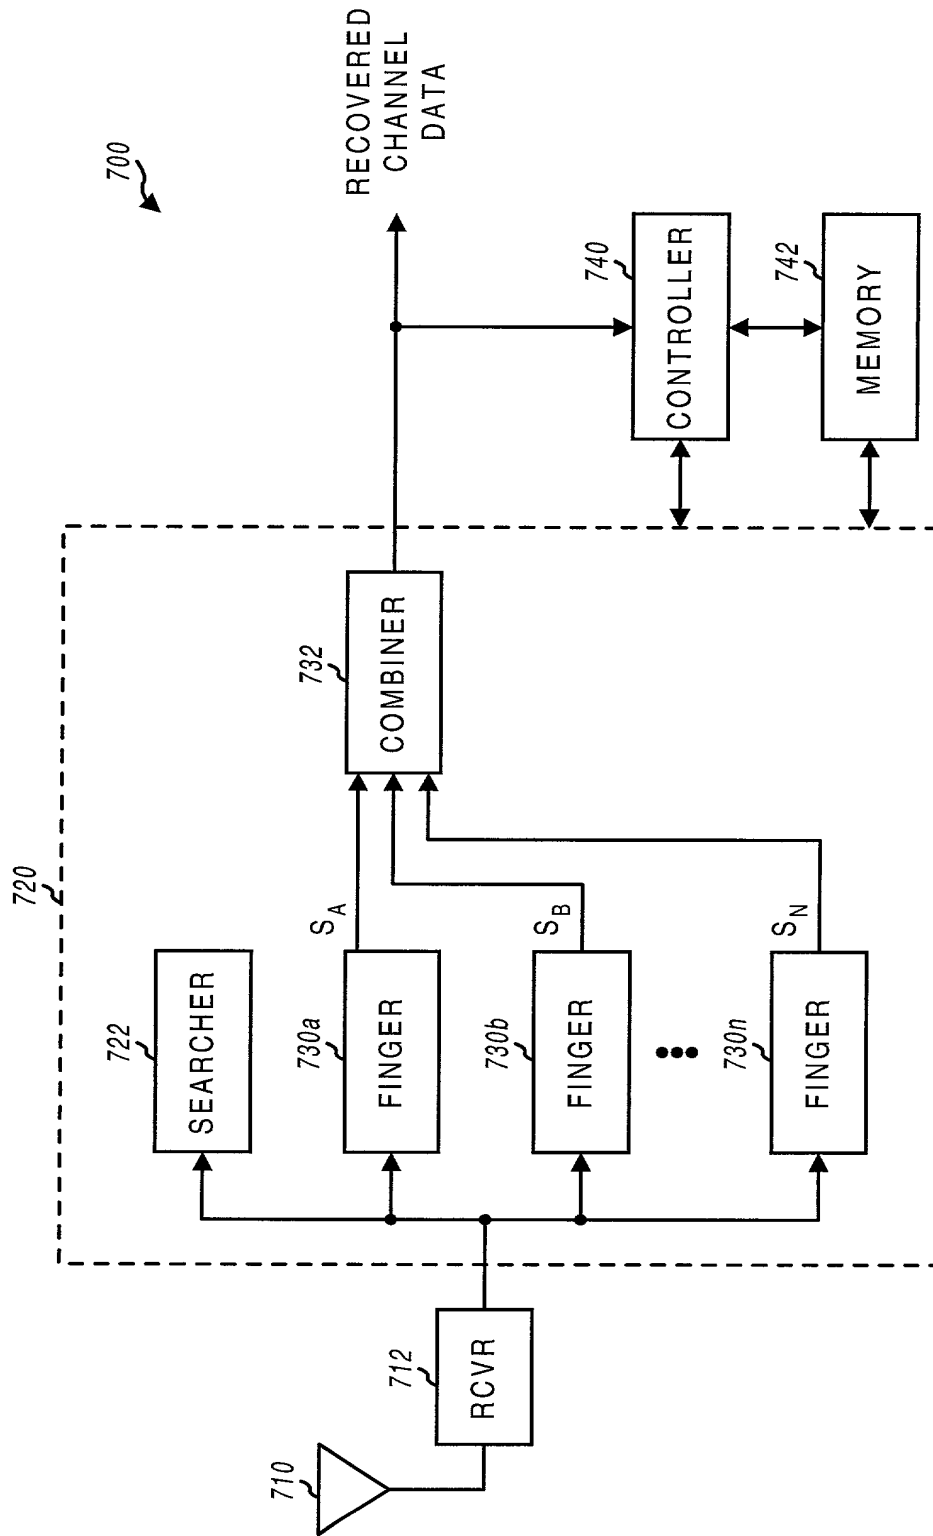


FIG. 7

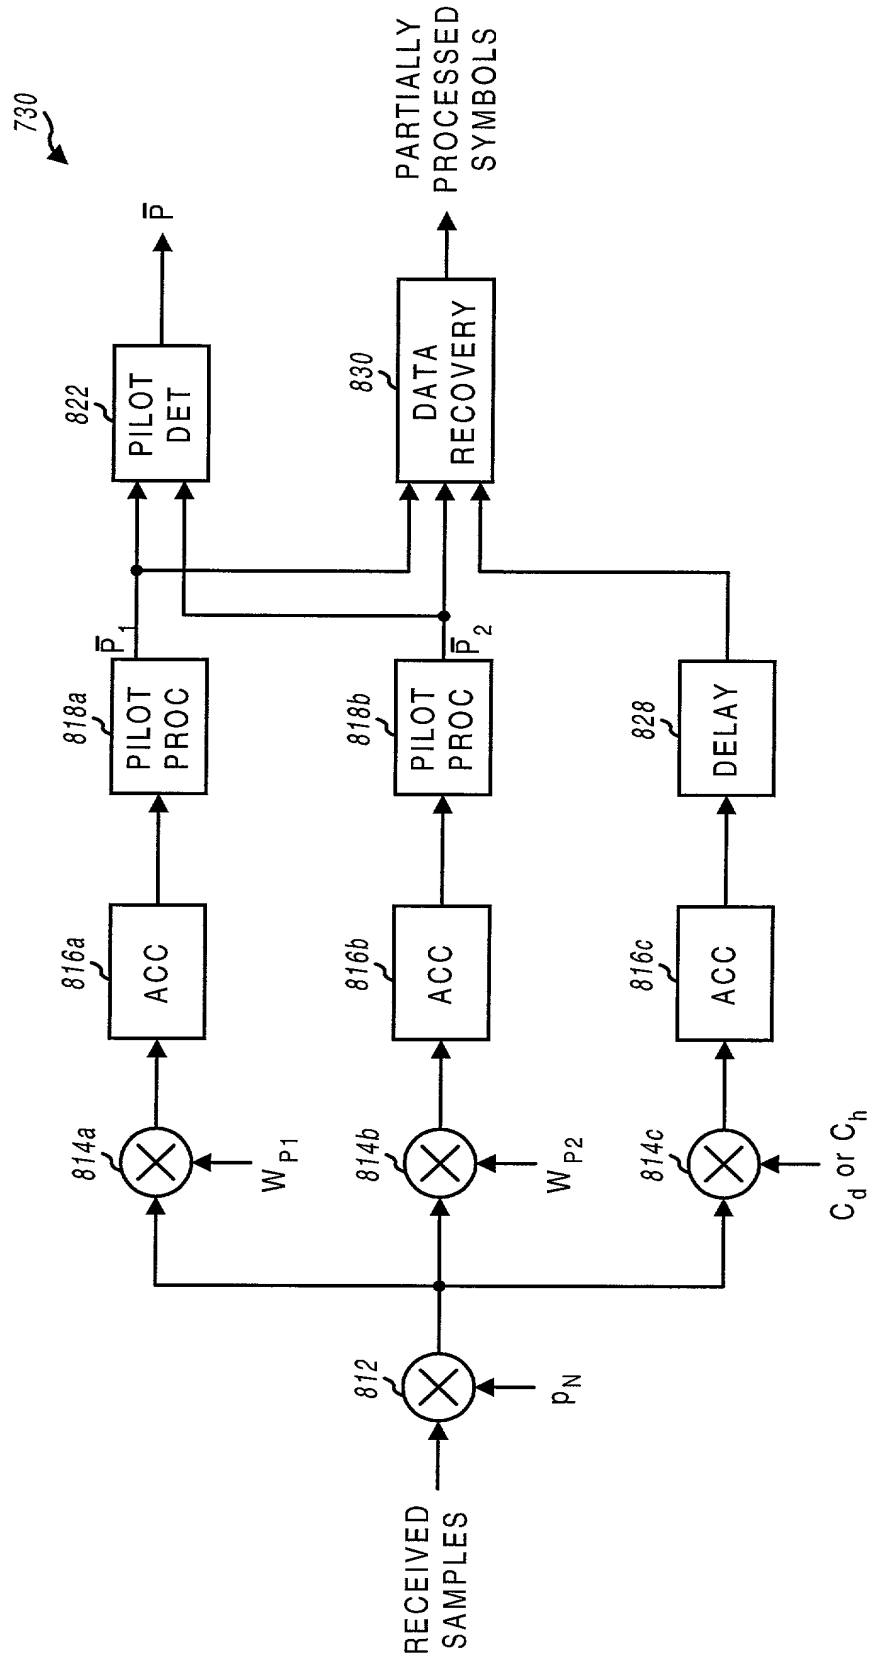


FIG. 8

Filtered Pilot
(antenna 1)

\dots	α	\dots
---------	----------	---------

Filtered Pilot
(antenna 2)

\dots	β	\dots
---------	---------	---------

Received Symbol
(using actual OVFSF code)

\dots	X_0	X_1	\dots
---------	-------	-------	---------

Received Symbol
(using hypothesized OVFSF code)

\dots	Y_{00}	Y_{01}	Y_{10}	Y_{11}	\dots
---------	----------	----------	----------	----------	---------

FIG. 9

COMBINED DECLARATION/POWER OF ATTORNEY

ATTORNEY DOCKET NO.: PA000442

AS BELOW NAMED INVENTOR, I HEREBY DECLARE THAT: This Declaration is of the following type:

☒ Original ☐ Supplemental ☐ Continuation-In-Part ☐ Divisional
☐ Continuation ☐ National Stage of PCT

My residence, post office address and citizenship are as stated below next to my name: I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled: **METHOD AND APPARATUS FOR PROCESSING A PHYSICAL CHANNEL WITH PARTIAL TRANSPORT FORMAT INFORMATION**, the specification of which:

☒ is attached hereto.
☐ was filed on _____ as Serial No. _____
☐ was described and claimed in PCT International Application No. _____ filed on _____
 and as amended under PCT Article 19 on _____

I hereby state that I have reviewed and understand the contents of the above-identified specification, including the claims, as amended by any amendment referred to above. I acknowledge the duty to disclose information which is material to the examination of this application in accordance with 37CFR § 1.56(a).

I hereby claim foreign priority benefits under 35 USC § 119 of any foreign applications for a patent or inventor's certificate or of any PCT International applications designating at least one country other than the United States listed below and have also identified below any foreign applications for a patent or inventor's certificate or any PCT International applications designating at least one country other than the United States filed by me on the same subject matter having a filing date before that of the applications of which priority is claimed.

Priority Claimed

(Country)	(Application No.)	(Day/Month/Year/Filed)	(Yes)	(No)
I hereby claim the benefit under 35 USC § 120 of the United States application(s) listed below, and insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of 35 USC § 112, I acknowledge the duty to disclose material information as defined in 37 CFR 1.56(a) which occurred between the filing date of the prior application and the national or PCT International filing date of this application:				

(Serial No.)	(Filing Date)	(Status)
I hereby appoint the following attorneys and/or agents to prosecute this application and to transact all business in the U.S. Patent and Trademark Office connected therewith: Russell B. Miller, Reg. No. 31,122, Gregory D. Ogrod, Reg. No. 30,880, Sean English, Reg. 37,319, Roger W. Martin Reg. No. 39, 291, Thomas R. Rouse Reg. No. 40,793, Kevin J. Clark, Reg. No. 42,421, Thomas Streeter Reg. No. 30,007, Kent D. Baker Reg. No. 38,882, Thomas M. Thibault Reg. No. 42,181, Charles D. Brown Reg. No. 28,285, Kyong H. Macek Reg. No 42, 977, Byron Yafuso Reg. No. 45,244, Pavel Kalousek Reg. No.44,178, Christopher O. Edwards Reg. No. 36,127, Raymond Hom Reg. No. 44,773, Bruce W. Greenhaus Reg. No. 37,339, Philip R. Wadsworth, Reg. No. 29,219; Sayed Hossain Beladi, Reg. No. 42,311, Michael D. Hartogs, Reg. No. 36,547; Albert J. Harnois, Reg. No. 46, 123, Sandra L. Godsey, Reg. No. 42,589, and Sandip Minhas, Reg. No. 44,945. Please direct all telephone calls to Philip R. Wadsworth at (858) 651-4404 and address all correspondence to: Jean Lupien, QUALCOMM Incorporated, 5775 Morehouse Drive, San Diego, California 92121-1714.		

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under 18 USC § and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Full Name of Sole or First Inventor Daisuke Terasawa	Inventor Signature	Date
Residence 10754 Chinon Circle, San Diego 92126	Citizenship Japanese	
Post Office Address 10754 Chinon Circle, San Diego 92126		
Full Name of Second or Joint Inventor if any Avneesh Agrawal:	Inventor Signature	Date
Residence 809 Pitkin Loop. San Jose, CA 95125	Citizenship India	
Post Office Address 809 Pitkin Loop. San Jose, CA 95125		

QUALCOMM Incorporated
 5775 Morehouse Drive
 San Diego, California 92121-1714
 Telephone: (858) 651-4404